JESCO

JESCO

JESCO MACHINERY LTD.

P.O.BOX 14-9, TAIPING, 411, TAICHUNG, TAIWAN
TEL: 886-4-22702676
FAX: 886-4-22706295
EMAIL: jescomachinery@gmail.com
WEBSITE: www.jesco.com.tw



EZI TURN 390

Headstock

- The headstock is built with induction hardened and precision ground gears.
- Main Spindle support by two precision taper roller bearings to ensure spindle rigidity and concentricity.
- High pressure oil lubrication is provided to all gears and bearings

Full Enclosed Guarding

Built and guarded to comply with the latest CE regulations to ensure complete operator safety.

Swarf Tray

Front moving chip-tray makes light work of swarf removal and reduces the amount of space required at the rear of the machine.



► EziTurn 390

Precision and Stability

Fully Enclosed Safety

Efficient Chip Removal

Enhanced Performance

One machine

mastering precision, safety, and efficiency.



FANUC 0i-TF PLUS

- FANUC 0i-TF PLUS is built in software:
  Turn Mate I, Manual Guide I and APP developed by JESCO.
- This software, JESCO-APP is developed using FANUC PICTURE and designed specifically for the 0i-TF PLUS controller.
- It aims to reduce user learning costs and improve operational efficiency through an intuitive teach pendant interface.






- **Graph Selection Display:**
  Provides graphs to select to suit various machining-working.



- Offers clear error diagnostics to help quickly resolve issues and minimize downtime.



- **Graphic Guidance Display:**
  Provide easy input of machining date.

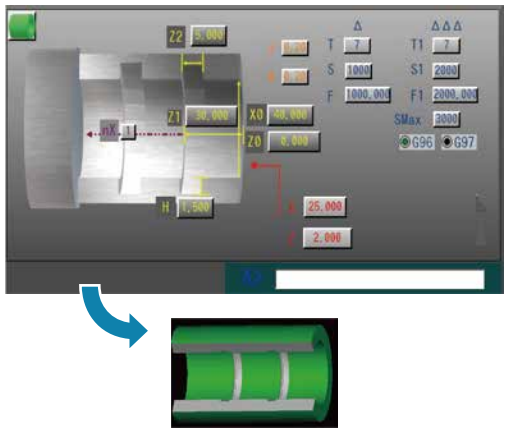




Machine Specification

MODEL	EziTurn 390
CAPACITY	
Swing over bed	390mm
Swing over cross slide	220mm
Distance between center	709mm / 1206mm
HEADSTOCK	
Spindle nose	D1-6 (A2-6)
Spindle bore	54mm
Spindle speeds:	60-3000 rpm (1-Step)
Spindle nose bush	MT6 x MT4
TAILSTOCK	
Quill travel	120mm
Quill diameter	58.5mm
Quill taper	MT4
BED	
Bed width	270mm
Max. longitudinal travel	420mm / 920mm
Max. turning length	370mm / 870mm
BALLSCREW	
X-Axis Ballscrew Dia.	20 x P5
Z-Axis Ballscrew Dia.	32 x P5
GENERAL INFORMATION	
Overall length	2548 / 3045
Overall width	1792
Overall height	1675
Weight (Approx. kgs)	1500/1800

*The above specification subject to change without prior notice.

FANUC (CP1550)

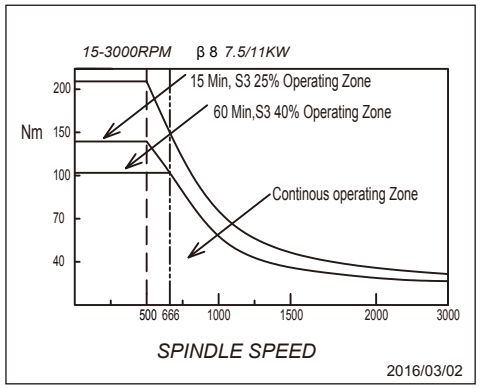

1550/1530 ENC Capacity diagram

